

Option I

WiFi Configuration

Via App
(Smart Phone/Pad)


I Preparation

1.1 Connect DC cable (PV strings) and turn on DC switch to start inverter.

1.2 Download 'SolarMan Tool' app from google play or app store and install it on smart phone or Pad. Run it.


*Note:
After Configuration, please browse <http://www.goodwe-power.com> to register and create your PV station*

II Press Configure Icon

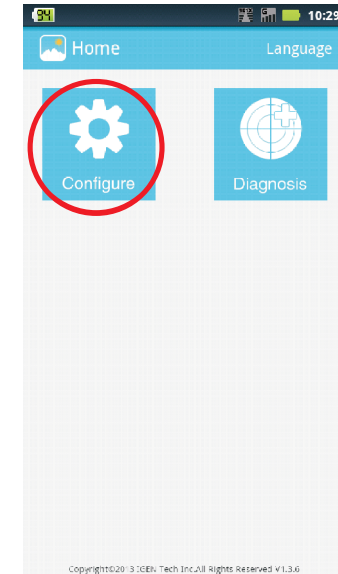


Copyright©2013 GEEH Tech, Inc. All Rights Reserved. V1.3.0

III Choose Enter Manually

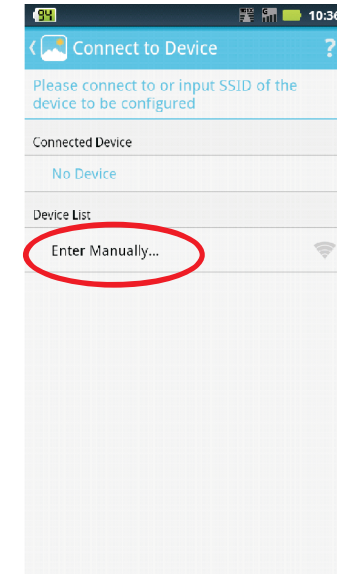

IV Input GoodWe-HF (No password needed)




Enter SSID

GoodWe-HF

Password


OK

V Press Next

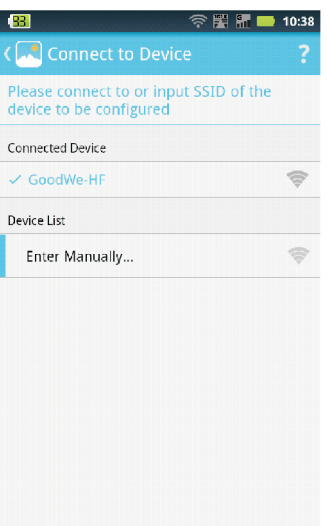

Next

VI Choose WiFi network And Input password

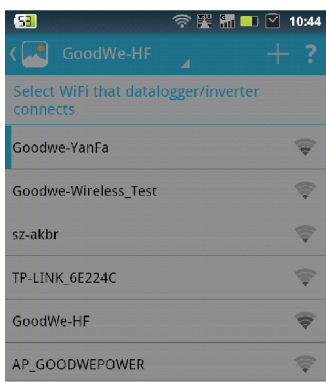


Enter network information

GoodWe-YanFa

.....

OK

VII Press Diagnose to Check Result

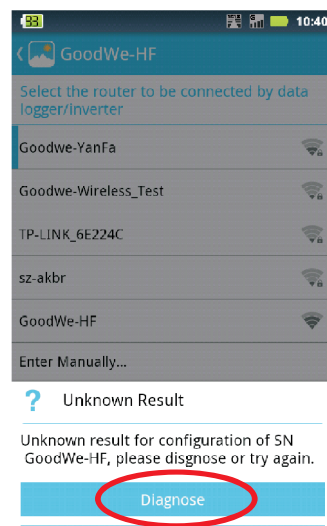


Unknown Result

Unknown result for configuration of SN GoodWe-HF, please disgnose or try again.

Diagnose

Try Again

VIII Waiting for Result.

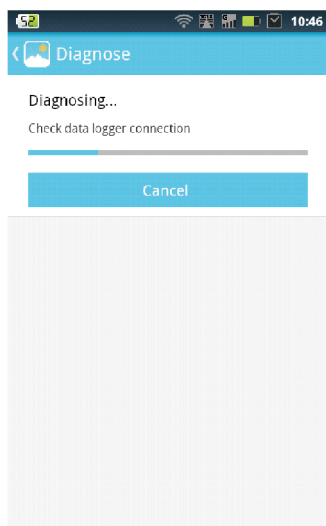


Diagnosing...

Check data logger connection

Cancel

IX OK



Configuration successful.

0 fault need to be handled

Send report Diagnose again

Connection status

```

graph TD
    Inverter --- WiFi
    WiFi --- Router
    Router --- Internet
    Inverter --- SolarPanel[Solar Panel]
    SolarPanel --- ChargeController[Charge Controller]
    ChargeController --- Inverter
  
```

Fault items(0)

Items to be optimized(0)

All diagnosis result